

ODV-3-460280-301N-MN

Optidrive Eco VFD Datasheet

18.5 kW (25 HP), 28 A, 500-600 V, 3PH

IP55 Variable Frequency Drive with TFT Display



Input Ratings

Supply Voltage	500-600 V
Input Phases	3
Supply Current Continuous	34 A
Supply Fuse or MCB (Type B)	40 A

Output Ratings

Motor Output Rating	18.5 kW (25 HP)
Output Voltage	0 – Supply Voltage
Output Current	28 A

Cable Information

Max Supply Cable Size	16 mm ² (0.02 sq in)
Max Motor Cable Size	16 mm ² (0.02 sq in)
Max Motor Cable Length	100 m (328 ft)

Factory Build Options

EMC Filter	No Internal EMC
Brake Transistor	No Brake Transistor
Enclosure	IP55
Display	TFT Display
PCB Coating	Standard

Dimensions

Size	4
Height	450 mm (17.72 in)
Width	171 mm (6.73 in)
Depth	252 mm (9.92 in)
Weight	11.5 kg (25.35 lbs)
Fixings	4 x M8

Packaged Dimensions


Height	510 mm (20.08 in)
Width	240 mm (9.45 in)
Depth	330 mm (12.99 in)
Weight	13.5 kg (29.76 lbs)




 **Buy this drive or get more information**
Find your local sales partner on
invertertekdrives.com

 **Invertertek**
Drives.com

How we measure our drives and packaging

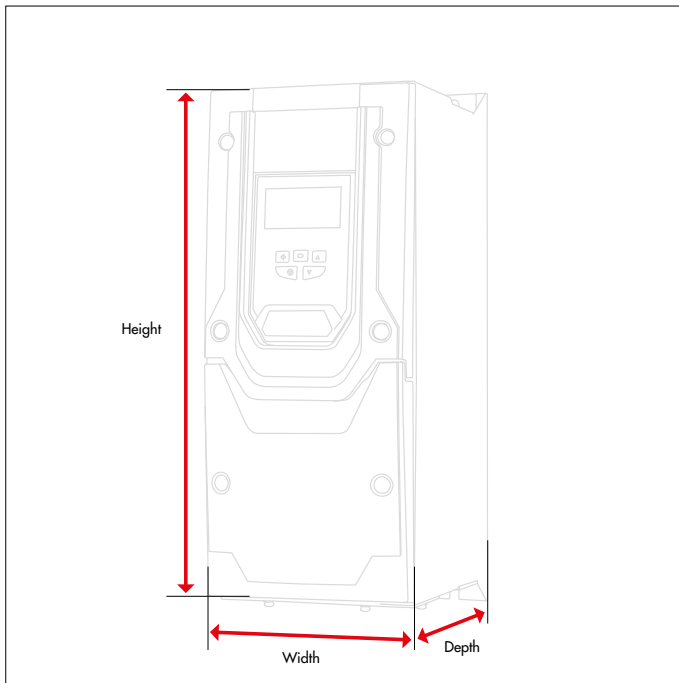

Drive Dimensions

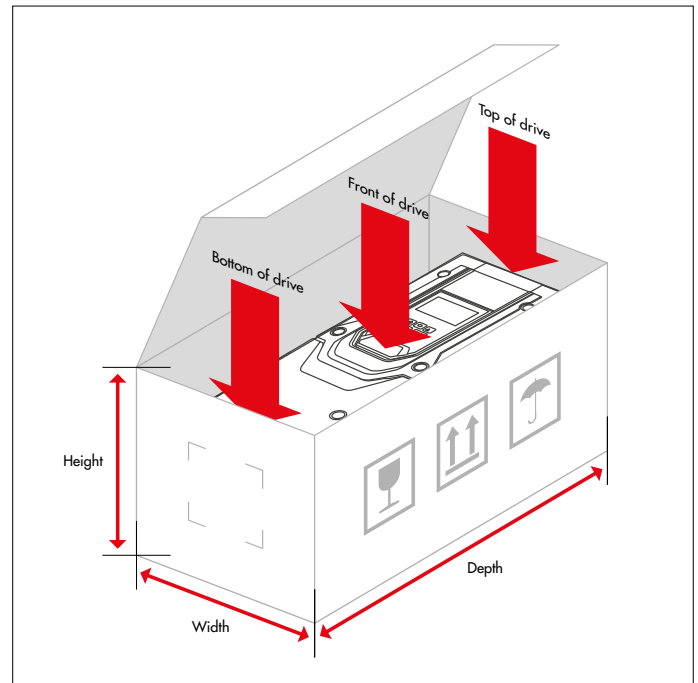

Packaging Dimensions



Buy this drive or get more information
Find your local sales partner on
invertekdrives.com

